


**FILTER G<sup>1</sup>/<sub>4</sub> ~ G<sup>1</sup>/<sub>2</sub>**

**Compressed Air**

Construction	Body—Techno-polymer Bowl—Polyamide with Guard
Drain	Automatic & Semi-Automatic
Standard Filter	20 x 10 <sup>-3</sup> mm
Ambient Temperature	+5 ~ +50 °C
Working Pressure	0 ~ 16 bar
Mounting	Vertical



Connection	Part Number		Bowl Capacity cm <sup>3</sup>	Flow at 6 Bar NI/min	Weight kg
	Semi Auto	Auto			
G <sup>1</sup> / <sub>4</sub>	<b>TA000013</b>	<b>FLA00013</b>	22	900	0.100
G <sup>3</sup> / <sub>8</sub>	<b>TA000014</b>	<b>TA000017</b>	42	1800	0.230
G <sup>1</sup> / <sub>2</sub>	<b>TA000015</b>	<b>TA000019</b>	100	2310	0.355

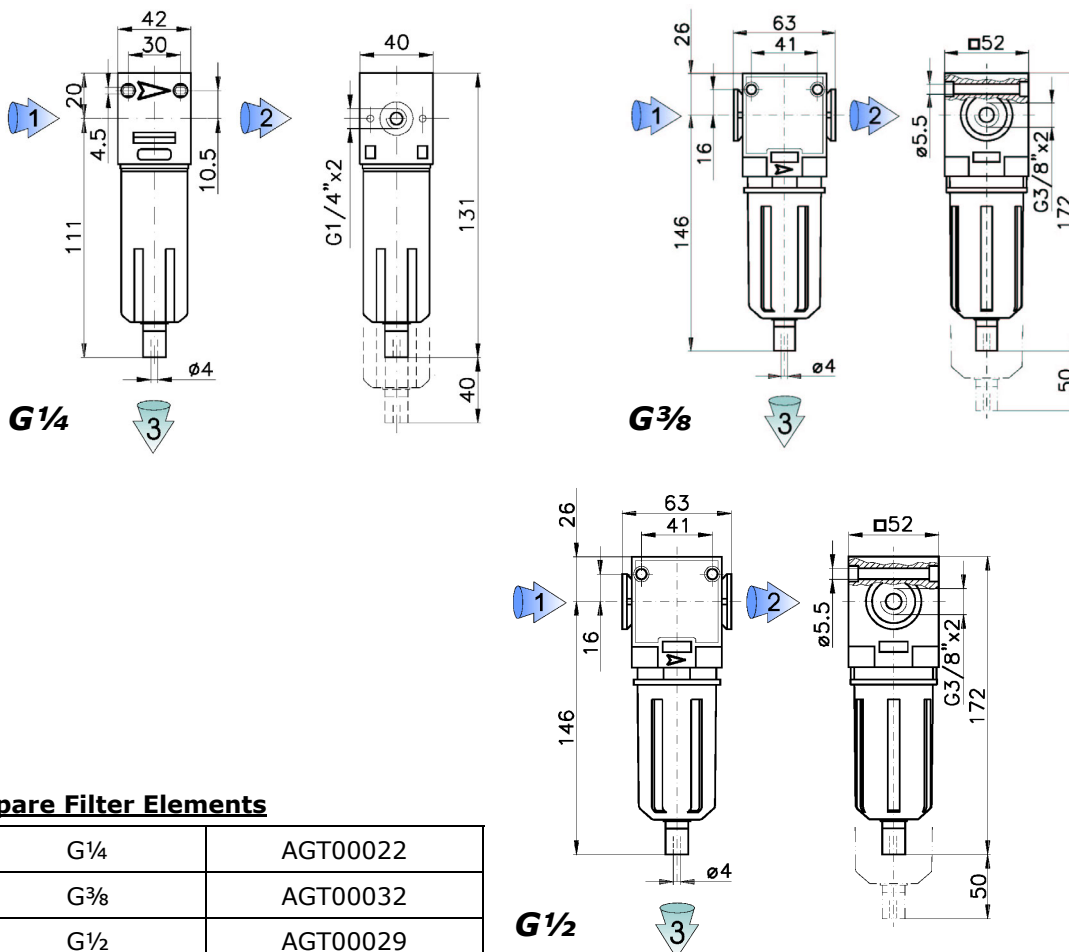

**Spare Filter Elements**

G <sup>1</sup> / <sub>4</sub>	AGT00022
G <sup>3</sup> / <sub>8</sub>	AGT00032
G <sup>1</sup> / <sub>2</sub>	AGT00029